



SPAN	MINIMUM PITCH	TOP CHORD LATERAL BRACE SPACING (DS)	TOP CHORD DIAGONAL BRACE SPACING (DS)
Up to 32'	4/12	8'	20'
Over 32' - 48'	4/12	6'	15'
Over 48' - 60'	5/12	6'	10'
Over 60'	5/12	6'	8'

DF - Douglas Fir-Larch
SP - Spruce-Pine-Fir
HF - Hem-Fir

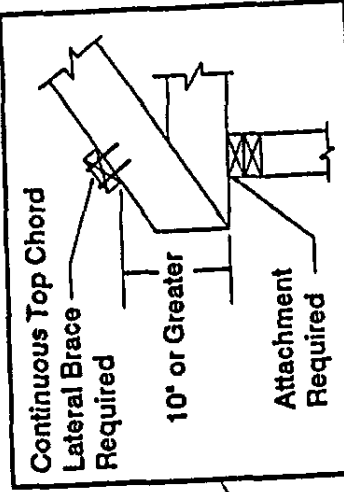

All lateral braces
lapped at least 2
trusses.

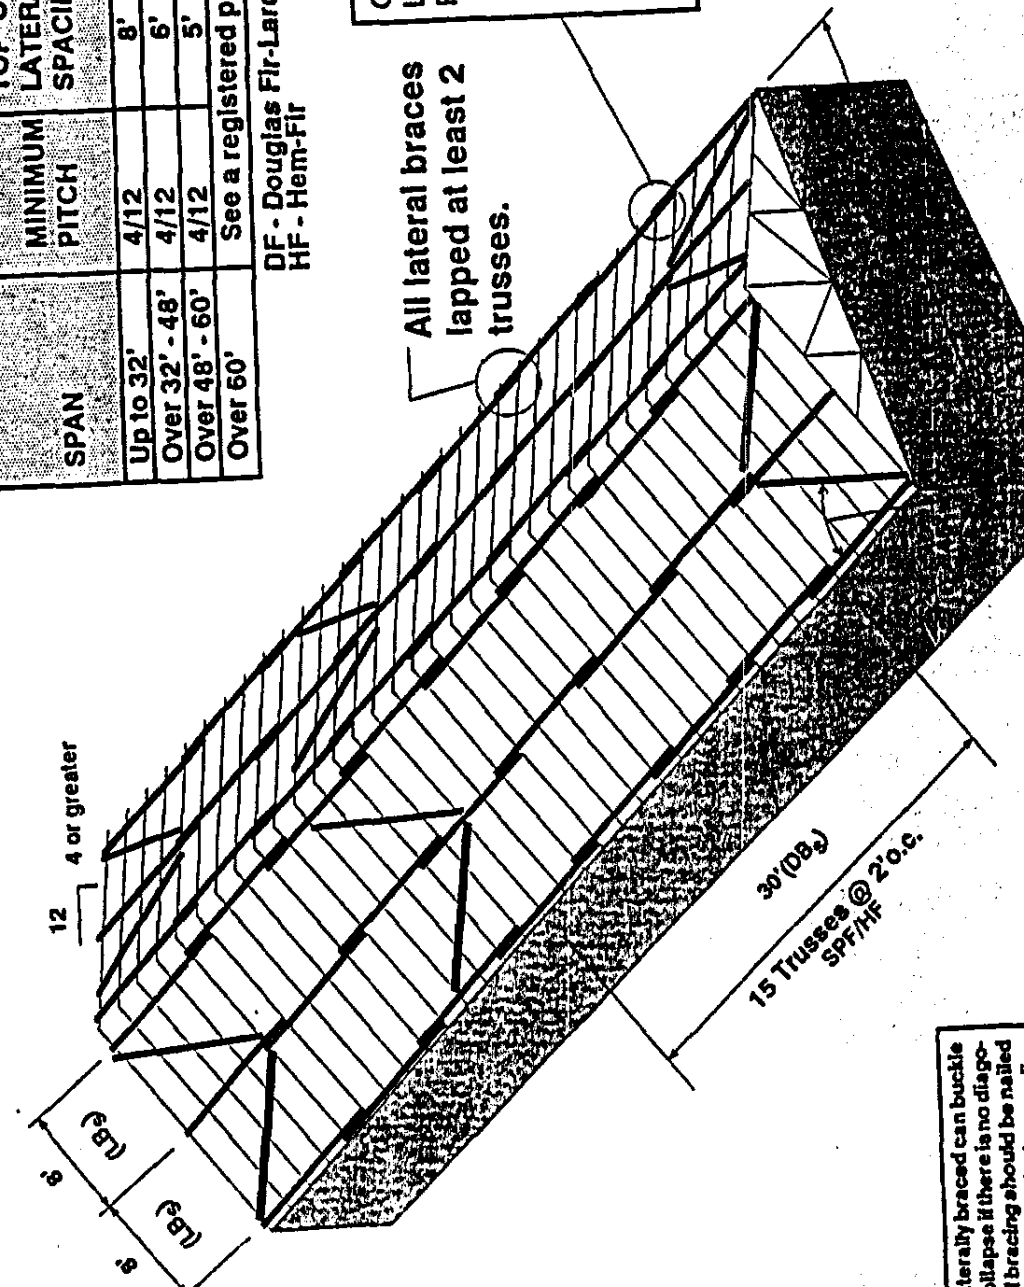


Top chords that are laterally braced can buckle together and downward bracing should be added to the underside of the top chord. See note on page 14 for details.


PITCHED TRUSS

SPAN	MINIMUM PITCH	TOP CHORD LATERAL BRACE SPACING (DS)	TOP CHORD DIAGONAL BRACE SPACING (DS)
Up to 28'	2.5	4'	8'
Over 28' - 40'	3.0	4'	6'
Over 40' - 50'	3.0	5'	5'
Over 50' - 60'	3.0	5'	3'

DF - Douglas Fir-Larch
SP - Spruce-Pine-Fir
HF - Hem-Fir

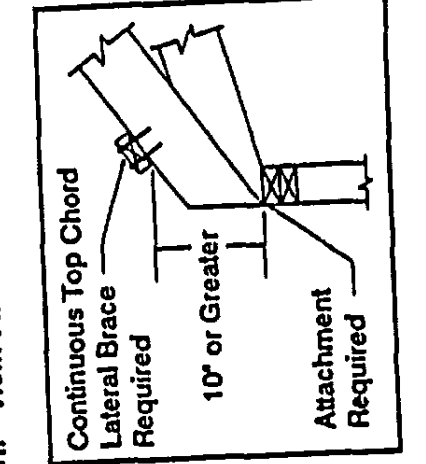

All lateral braces
lapped at least 2
trusses.

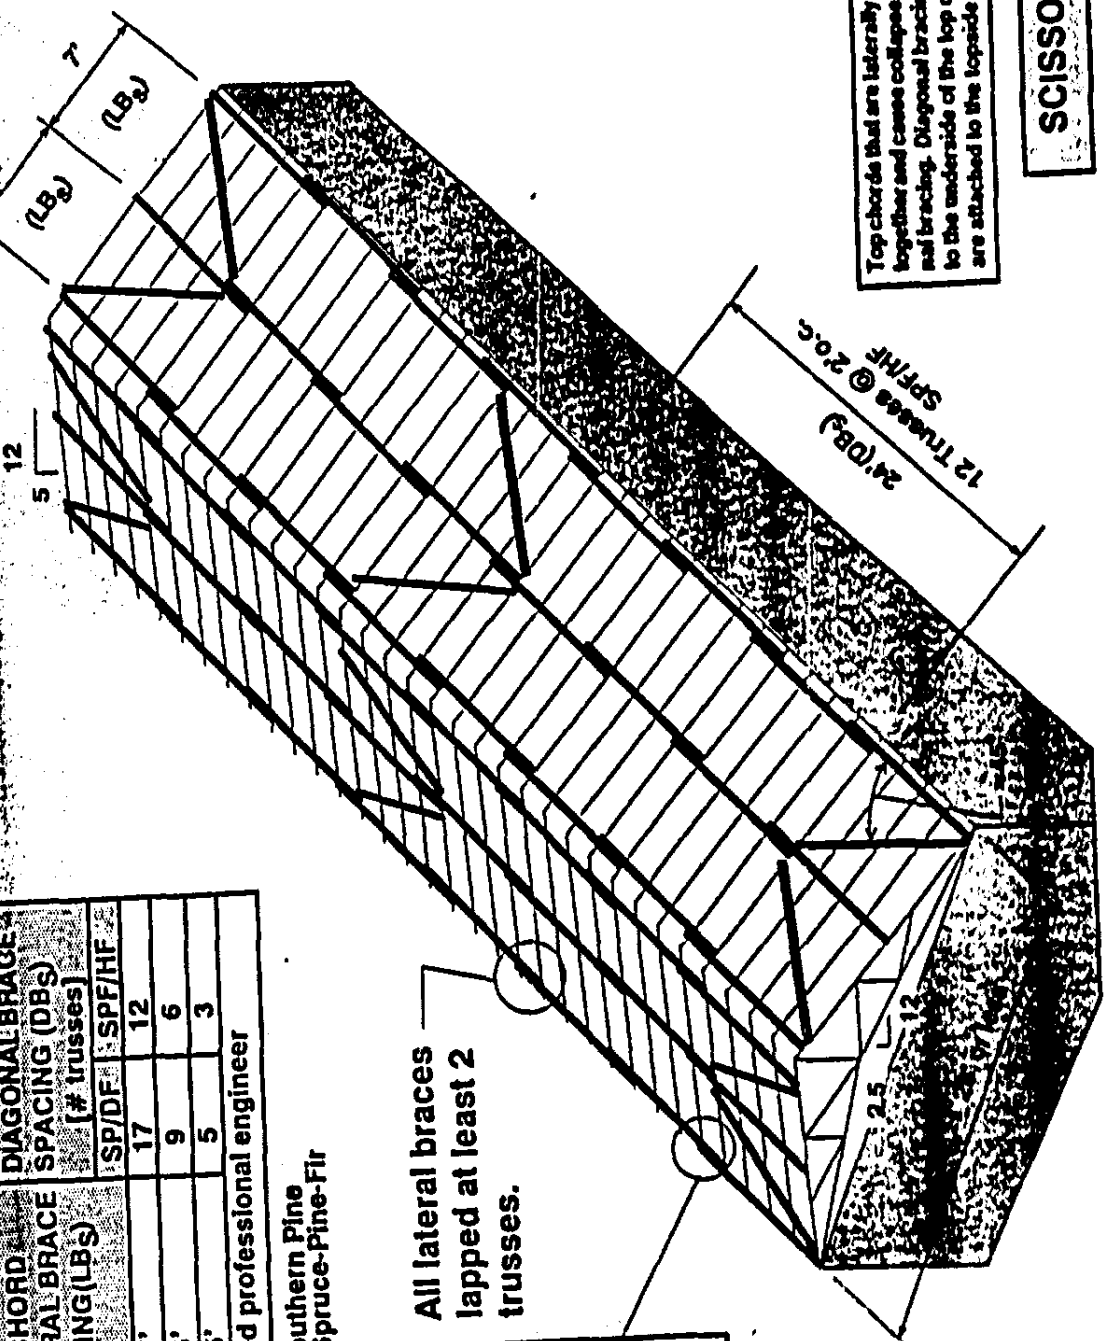

Top chords that are laterally braced can buckle together and downward bracing should be added to the underside of the top chord. See note on page 14 for details.

SCISSOR TRUSS

Frame 3