


Truss Hangers

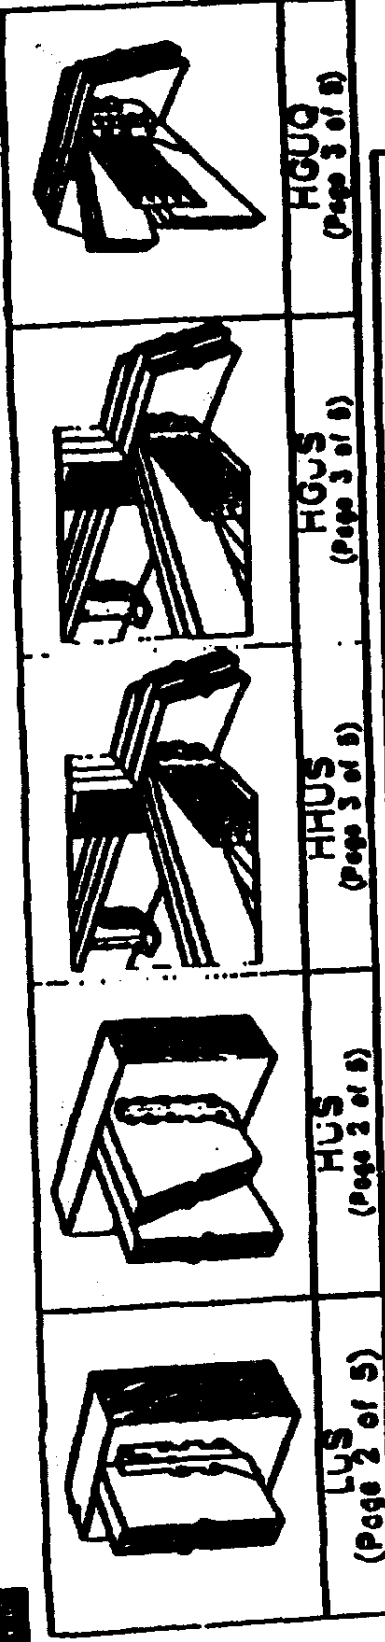

LUS (0-10' x 4' x 5')	HUS (0-10' x 4' x 5')	HQU (0-10' x 4' x 5')	SUL/R (0-10' x 4' x 5')	THA (0-10' x 4' x 5')

GENERAL NOTES

- IN ACCORDANCE WITH SECTION 1707.3 OF THE FLORIDA BUILDING CODE, THE ALLOWABLE LOADS SHOWN IN THE TABLES ON THE PAGES TO FOLLOW ARE BASED UPON THE LOWEST VALUE OF THE FOLLOWING:
 - PER SECTION 1707.3.1.1 OF THE CODE, THE LOWEST ULTIMATE LOAD OF THREE TESTS DIVIDED BY A FACTOR OF SAFETY OF THREE WHEN TESTED IN ACCORDANCE WITH ASTM-D178.
 - RECORDED WHERE THE JOINT MOVEMENT WITH RESPECT TO THE HANGER EQUALS AS DETERMINED FROM TESTING IN ACCORDANCE WITH ASTM-D178.
 - PER SECTION 1707.3.1.3 OF THE CODE, THE LOWEST LOAD OF THREE TESTS DIVIDED BY A FACTOR OF SAFETY OF THREE WHEN TESTED IN ACCORDANCE WITH ASTM-D178.

THE CONNECTION DETERMINED IN ACCORDANCE WITH THE NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION 1987 EDITION USING WOOD WITH A MINIMUM SPECIFIC GRAVITY OF 0.55.

- THE STEEL SHALL CONFORM TO THE REQUIREMENTS SET FORTH IN THIS SPECIFICATION AND SHALL HAVE A MINIMUM GALVANIZED COATING OF 0.60.
- FASTENERS ARE COMMON WIRE NAILS UNLESS OTHERWISE NOTED.
- ALLOWABLE PULL LOADS HAVE BEEN INCREASED 15% FOR WIND LOADING WITH NO OTHER DURATION INCREASES ALLOWED.
- ALLOWABLE DOWNLOADS HAVE NOT BEEN INCREASED BY ANY DURATION FACTOR.

MODEL NO.	MATERIAL	ASTM SPEC.	W	D	H
LUS	18 G	A36	2 1/2"	4"	5"
HUS	18 G	A36	2 1/2"	4"	5"
HQU	18 G	A36	2 1/2"	4"	5"
SUL/R	18 G	A36	2 1/2"	4"	5"
THA	18 G	A36	2 1/2"	4"	5"

PRODUCT REVISED
BY: [Signature]
DATE: 02-07-02
REASON: [Signature]
[Signature]
[Signature]

SIMPSON STRONG-TIE, INC.
1720 COLLEGE DR.
VICKSBURG, TX 75589
TEL: (800) 949-5589
DWG. # 021301
DATE: 1/02 SCALE: N'S
DWG. BY: JMG