


FULL ROUND
TYPICAL ELEVATION

WINDOW DIAMETER INCHES	DESIGN PRESSURE CHART - PSP									
	EIGHT ANCHORS		FOUR ANCHORS							
	GLASS		GLASS				150# ANNUAL		150# ANNUAL	
	300# TENSILE	300# NEG.	300# TENSILE	300# NEG.	300# TENSILE	300# NEG.	300# TENSILE	300# NEG.	POS.	NEG.
46	100.0	132.0	66.0	66.00	53.0	53.0	30.0	30.0		
36	100.0	125.0	100.0	108.0	80.0	89.0	51.0	51.0		
24	100.0	415.0	100.0	243.0	80.0	212.0	80.0	120.0		

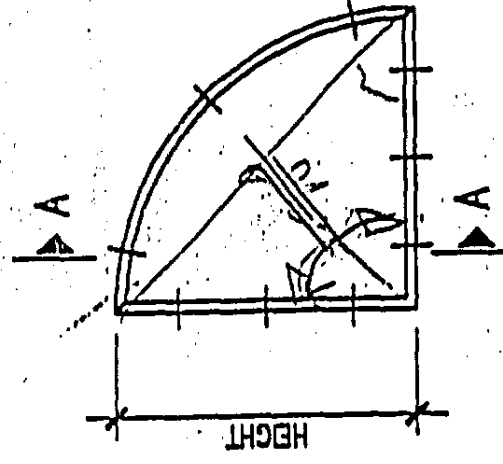

QUARTER ROUND
TYPICAL ELEVATION

WINDOW HEIGHT INCHES	DESIGN PRESSURE CHART - PSF								NUMBER OF ANCHORS	
	GLASS						ISG ANGLE			
	3/16" TEMPERED		3/16" ANGLE		ISG ANGLE				BASE	ARCH
	POS.	NEG.	POS.	NEG.	POS.	NEG.	POS.	NEG.	6"	4"
46	100.0	165.0	53.0	53.0	30.0	30.0	6	4		
36	100.0	189.0	80.0	89.0	54.0	54.0	4	3		
24	160.0	425.6	60.0	213.0	60.0	120.0	4	3		

TYPICAL ELEVATION

[illegible]

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE November 15, 2000
BY Manuel Perez
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 00-051207

27